


CFA COMPACT FAN AIR


SFA STANDARD FAN AIR



ЕЛТРОН ЕООД
 гр. Велико Търново
 местност Дълга Лъка
 ул. Трета 5
 тел. 062/ 601 359
 моб. 0884/ 614 800
www.tron.bg
www.eltron-bg.com

Code	bar	Drop Size Rating	l/min	l/da									
				4	6	8	10	12	14	16	18	20	25
				km/h									
CFA 11001 оранжев	1.5	XC	0.28	8.5	5.7	4.2	3.4	2.8	2.4	2.1	1.9	1.7	1.4
	3	C	0.40	12.0	8.0	6.0	4.8	4.0	3.4	3.0	2.7	2.4	1.9
	5	C	0.52	15.5	10.3	7.7	6.2	5.2	4.4	3.9	3.4	3.1	2.5
	7	M	0.61	18.3	12.2	9.2	7.3	6.1	5.2	4.6	4.1	3.7	2.9
	8	M	0.65	19.6	13.1	9.8	7.8	6.5	5.6	4.9	4.4	3.9	3.1
CFA 11002 жълт	1.5	XC	0.57	17.0	11.3	8.5	6.8	5.7	4.8	4.2	3.8	3.4	2.7
	3	C	0.80	24.0	16.0	12.0	9.6	8.0	6.9	6.0	5.3	4.8	3.8
	5	C	1.03	31.0	20.7	15.5	12.4	10.3	8.9	7.7	6.9	6.2	5.0
	7	C	1.22	36.7	24.4	18.3	14.7	12.2	10.5	9.2	8.1	7.3	5.9
	8	C	1.31	39.2	26.1	19.6	15.7	13.1	11.2	9.8	8.7	7.8	6.3
CFA 11003 син	1.5	XC	0.85	25.5	17.0	12.7	10.2	8.5	7.3	6.4	5.7	5.1	4.1
	3	VC	1.20	36.0	24.0	18.0	14.4	12.0	10.3	9.0	8.0	7.2	5.8
	5	VC	1.55	46.5	31.0	23.2	18.6	15.5	13.3	11.6	10.3	9.3	7.4
	7	C	1.83	55.0	36.7	27.5	22.0	18.3	15.7	13.7	12.2	11.0	8.8
	8	C	1.96	58.8	39.2	29.4	23.5	19.6	16.8	14.7	13.1	11.8	9.4
CFA 11004 червен	1.5	XC	1.13	33.9	22.6	17.0	13.6	11.3	9.7	8.5	7.5	6.8	5.4
	3	XC	1.60	48.0	32.0	24.0	19.2	16.0	13.7	12.0	10.7	9.6	7.7
	5	VC	2.07	62.0	41.3	31.0	24.8	20.7	17.7	15.5	13.8	12.4	9.9
	7	C	2.44	73.3	48.9	36.7	29.3	24.4	20.9	18.3	16.3	14.7	11.7
	8	C	2.61	78.4	52.3	39.2	31.4	26.1	22.4	19.6	17.4	15.7	12.5
CFA 11005 кафяв	1.5	XC	1.41	42.4	28.3	21.2	17.0	14.1	12.1	10.6	9.4	8.5	6.8
	3	XC	2.00	60.0	40.0	30.0	24.0	20.0	17.1	15.0	13.3	12.0	9.6
	5	VC	2.58	77.5	51.6	38.7	31.0	25.8	22.1	19.4	17.2	15.5	12.4
	7	VC	3.06	91.7	61.1	45.8	36.7	30.6	26.2	22.9	20.4	18.3	14.7
	8	C	3.27	98.0	65.3	49.0	39.2	32.7	28.0	24.5	21.8	19.6	15.7
422SFA 11006 сив	1.5	UC	1.70	50.9	33.9	25.5	20.4	17.0	14.5	12.7	11.3	10.2	8.1
	3	UC	2.40	72.0	48.0	36.0	28.8	24.0	20.6	18.0	16.0	14.4	11.5
	5	XC	3.10	93.0	62.0	46.5	37.2	31.0	26.6	23.2	20.7	18.6	14.9
	7	XC	3.67	110.0	73.3	55.0	44.0	36.7	31.4	27.5	24.4	22.0	17.6
	8	XC	3.92	117.6	78.4	58.8	47.0	39.2	33.6	29.4	26.1	23.5	18.8
422SFA 11008 бял	1.5	XC	2.26	67.9	45.3	33.9	27.2	22.6	19.4	17.0	15.1	13.6	10.9
	3	XC	3.20	96.0	64.0	48.0	38.4	32.0	27.4	24.0	21.3	19.2	15.4
	5	XC	4.13	123.9	82.6	62.0	49.6	41.3	35.4	31.0	27.5	24.8	19.8
	7	XC	4.89	146.6	97.8	73.3	58.7	48.9	41.9	36.7	32.6	29.3	23.5
	8	XC	5.23	156.8	104.5	78.4	62.7	52.3	44.8	39.2	34.8	31.4	25.1
422SFA 11010 св. син	1.5	UC	2.83	84.9	56.6	42.4	33.9	28.3	24.2	21.2	18.9	17.0	13.6
	3	UC	4.00	120.0	80.0	60.0	48.0	40.0	34.4	30.0	26.7	24.0	19.2
	5	XC	5.16	154.9	103.3	77.5	62.0	51.6	44.3	38.7	34.4	31.0	24.8
	7	XC	6.11	183.3	122.2	91.7	73.3	61.1	52.4	45.8	40.7	36.7	29.3
	8	XC	6.53	196.0	130.6	98.0	78.4	65.3	56.0	49.0	43.5	39.2	31.4

DROP SIZE RATING		
M	Medium	177µm ÷ 218µm
C	Coarse	218µm ÷ 349µm
VC	Very coarse	349µm ÷ 428µm
XC	Extremely coarse	428µm ÷ 622µm
UC	Ultra coarse	> 622 µm

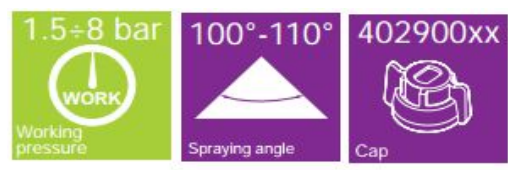

µm = thousandth of millimeter (E.g.: 250µm = 0.25 mm)