




GENERAL FEATURES

- Power supply 9÷16 VDC
- Working status, Link and Error LED indicators
- Digital inputs: For sensors Open collector Max frequency 2000Hz
- Analog inputs: 4-20 mA
- Digital outputs (valves): High active (max 200 mA)
- Hydraulic valve power outputs: High active (max 2,5 A)
- Section line power outputs: High active (max 18 A for line)
- H-Bridge output: 5 A
- Protection against polarity inversion: Yes
- Protection against short-circuit: Yes
- Watertight connectors with bayonet coupling

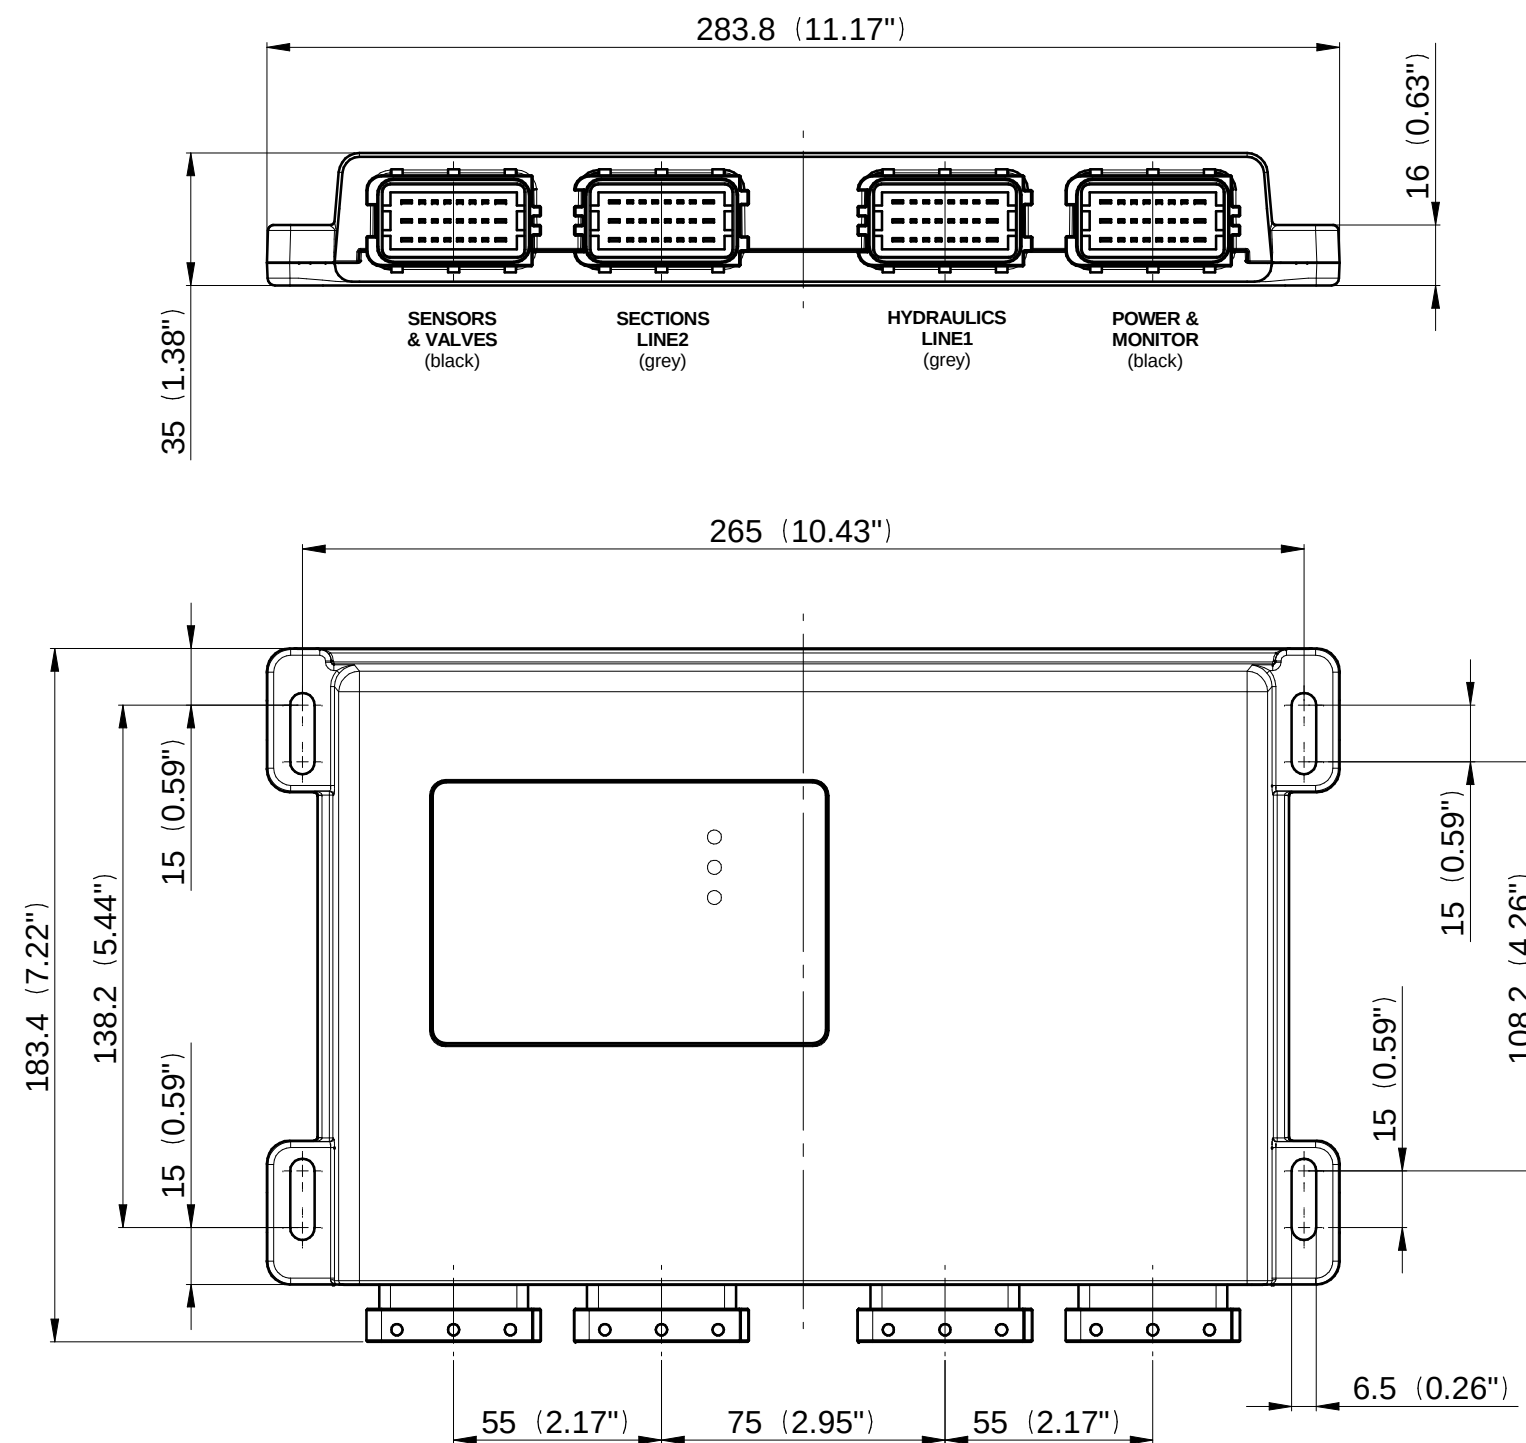

MECHANICAL FEATURES

- Working temperature -40÷60 °C (-40÷140 °F)
- Storage temperature -40÷85 °C (-40÷185 °F)
- Protection class IP65 (with connectors inserted)
- External body: die-cast aluminum with cataphoresis treatment
- Connectors in PBT
- Label in PET

ARAG
A Nordson Company

SP. CODE

-

CODICE/PART NUMBER

4679000

REV

0

DENOMINAZIONE/PART DESCRIPTION

UNITA CONTR. IBX100 SPRAYER

TOLLERANZE GENERALI EN-ISO 2768-VL

GENERAL TOLERANCES

PRIMA EMISSIONE/FIRST ISSUE

DISEGNATO/DRAWN

Bassi L.

DATA/DATE

17/03/2026

SCALA/SCALE

1:2

FORMATO SIZE

A3

QUESTO E' UN DOCUMENTO RISERVATO DI PROPRIETA' DI ARAG srl, via Palladio 5/A 42048 RUBIERA (RE) ITALY. IL SUO CONTENUTO NON POTRA' ESSERE COMUNICATO A TERZI SENZA IL PERMESSO SCRITTO DEL PROPRIETARIO.
THIS CONFIDENTIAL DOCUMENT IS EXCLUSIVE PROPERTY OF ARAG srl, via Palladio 5/A 42048 RUBIERA (RE) ITALY. ITS CONTENTS CANNOT BE DISCLOSED TO ANYONE WITHOUT WRITTEN PERMISSION OF THE OWNER.

REV. 03