




Regulation valves

GYMATIC 3/A 'C'

250 bar

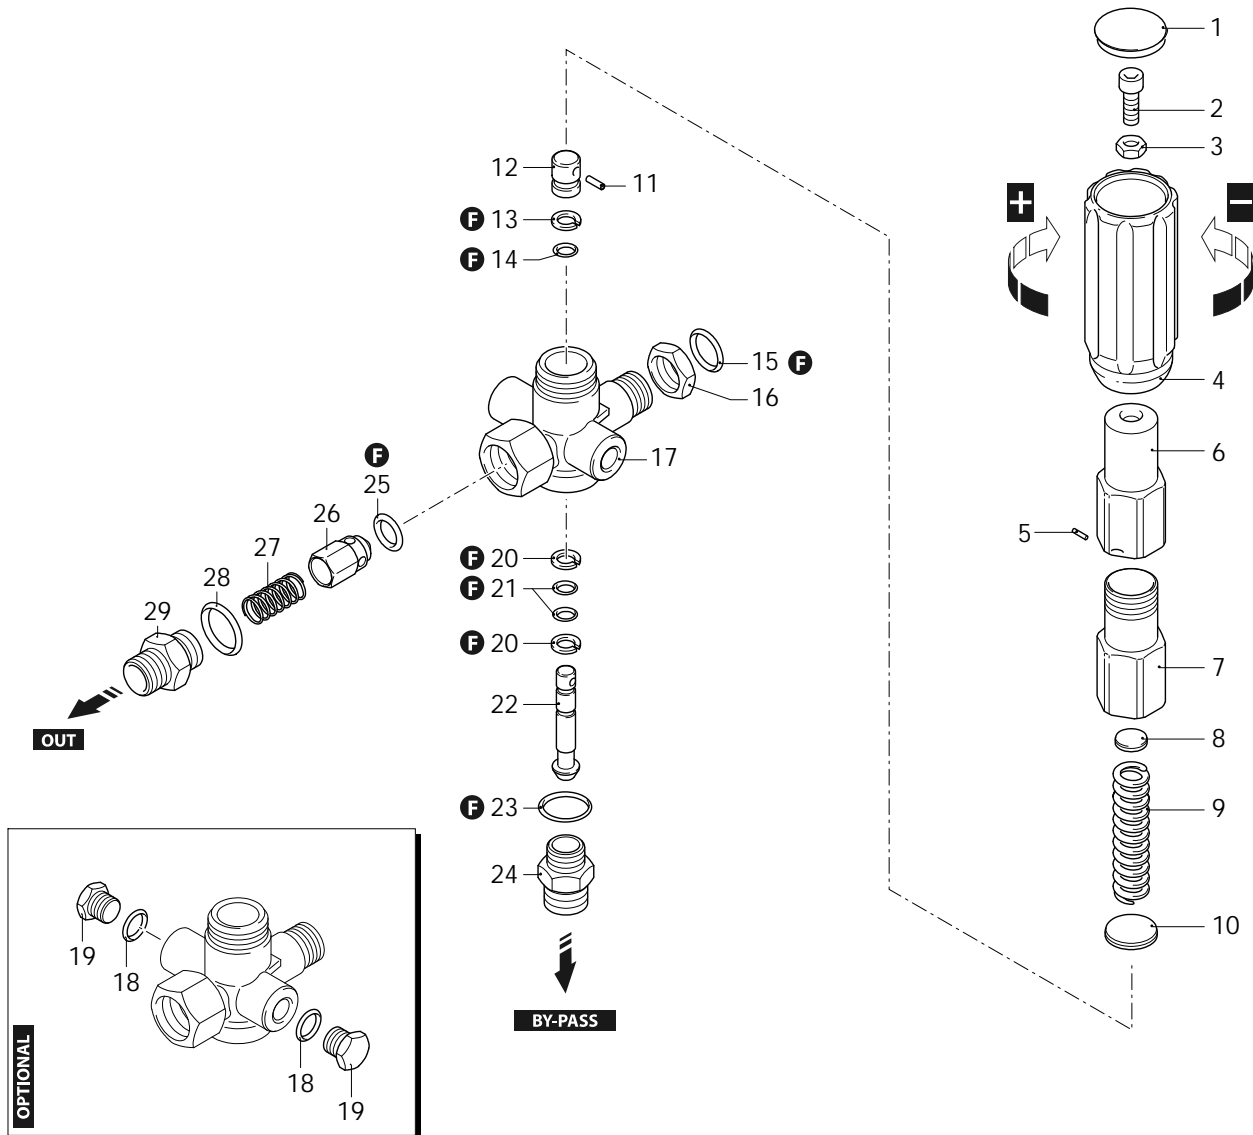

AR-1_000177_v01

26/11/2021



Regulation valves

GYMATIC 3/A 'C'

250 bar

P	Code	Description	Q	Note	Validity	P	Code	Description	Q	Note	Validity
1	1560580	Plug	1								
2	540290	Screw	1	C=25Nm							
3	1660210	Nut	1								
4	1560400	Knob	1								
5	1080070	Pin	1								
6	1560420	Screw	1	Lubricate with grease Molykote PG54							
7	1560410	Guide	1	C=35Nm							
8	1560440	Wobble plate	1								
9	1560350	Spring	1								
10	1080610	Wobble plate	1								
11	1080860	Pin	1								
12	1080540	Piston	1	Lubricate with grease Molykote PG54							
13	1080640	Ring	1	anti-extrusion							
14	391000	O-ring	1	Lubricate with grease Molykote PG54							
15	740290	O-ring	1	Lubricate with grease Molykote PG54							
16	1080390	Nut	1								
17	1560020	Valve body	1								
18	820510	O-ring	2								
19	880581	Plug	2	Screw with Loxeal 55-14 / C=15Nm							
20	1080550	Ring	2	anti-extrusion							
21	480480	O-ring	2								
22	1569001	Piston	1	inferiore							
23	880270	O-ring	1								
24	1560810	Fitting	1								
25	1560151	O-ring	1	90 Sh							
26	1560890	Shutter	1								
27	1560140	Spring	1								
28	180101	O-ring	1	Lubricate with grease Molykote PG54							
29	1560110	Fitting	1	C=35Nm							
F	2610	Gasket kit	1								

Revision: 1

Oil type: -

Attachment:

Date: 26/11/2021

Oil quantity: -

C=Tightening torque (Tolerance +0 ÷ -10%)