


BX BOOM EXTENSION NOZZLE

ЕЛТРОН ЕООД

гр. Велико Търново
местност Дълга Лъка
ул. Трета №5
тел. 062/ 601 359
моб. 0884/ 614 800
www.tron.bg
www.eltron-bg.com

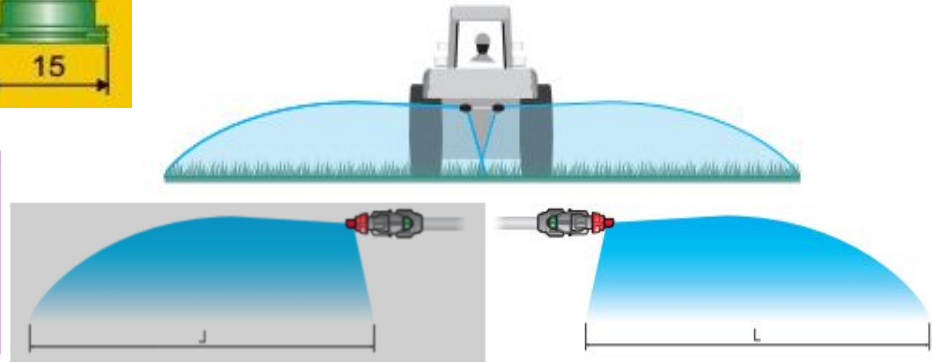

| Code | bar | Drop Size Rating | Flow Rate (l/min) | L (m) | I/da | | | | | | | | |
|-----------------------|-----|------------------|-------------------|-------|-------|------|------|------|------|------|------|------|------|
| | | | | | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
| ВХ010 зелен | 2 | UC | 3.20 | 2.1 | 22.7 | 15.2 | 11.4 | 9.1 | 7.6 | 6.5 | 5.7 | 5.1 | 4.5 |
| | 3 | UC | 3.90 | 2.6 | 22.5 | 15.0 | 11.3 | 9.0 | 7.5 | 6.4 | 5.6 | 5.0 | 4.5 |
| | 4 | UC | 4.50 | 3.1 | 21.8 | 14.5 | 10.9 | 8.7 | 7.3 | 6.2 | 5.4 | 4.8 | 4.4 |
| | 5 | XC | 5.00 | 3.9 | 19.4 | 12.9 | 9.7 | 7.7 | 6.5 | 5.5 | 4.8 | 4.3 | 3.9 |
| ВХ020 син | 2 | UC | 6.50 | 2.8 | 34.6 | 23.0 | 17.3 | 13.8 | 11.5 | 9.9 | 8.6 | 7.7 | 6.9 |
| | 3 | UC | 7.90 | 3.2 | 37.0 | 24.7 | 18.5 | 14.8 | 12.3 | 10.6 | 9.3 | 8.2 | 7.4 |
| | 4 | UC | 9.10 | 3.5 | 39.1 | 26.1 | 19.5 | 15.6 | 13.0 | 11.2 | 9.8 | 8.7 | 7.8 |
| | 5 | UC | 10.20 | 3.7 | 41.3 | 27.6 | 20.7 | 16.5 | 13.8 | 11.8 | 10.3 | 9.2 | 8.3 |
| ВХ025 жълт | 2 | UC | 7.70 | 2.5 | 46.1 | 30.7 | 23.0 | 18.4 | 15.4 | 13.2 | 11.5 | 10.2 | 9.2 |
| | 3 | UC | 9.40 | 3.0 | 47.0 | 31.3 | 23.5 | 18.8 | 15.7 | 13.4 | 11.8 | 10.4 | 9.4 |
| | 4 | UC | 10.90 | 3.3 | 49.3 | 32.9 | 24.7 | 19.7 | 16.4 | 14.1 | 12.3 | 11.0 | 9.9 |
| | 5 | UC | 12.10 | 3.5 | 52.0 | 34.7 | 26.0 | 20.8 | 17.3 | 14.9 | 13.0 | 11.6 | 10.4 |
| ВХ025 оран- жев | 2 | UC | 14.10 | 2.9 | 73.1 | 48.7 | 36.5 | 29.2 | 24.4 | 20.9 | 18.3 | 16.2 | 14.6 |
| | 3 | UC | 17.30 | 3.0 | 86.5 | 57.7 | 43.3 | 34.6 | 28.8 | 24.7 | 21.6 | 19.2 | 17.3 |
| | 4 | UC | 20.00 | 3.3 | 90.8 | 60.5 | 45.4 | 36.3 | 30.3 | 25.9 | 22.7 | 20.2 | 18.2 |
| | 5 | UC | 22.30 | 3.5 | 95.7 | 63.8 | 47.9 | 38.3 | 31.9 | 27.3 | 23.9 | 21.3 | 19.1 |
| ВХ025 кафяв | 2 | UC | 18.10 | 3.0 | 90.6 | 60.4 | 45.3 | 36.3 | 30.2 | 25.9 | 22.7 | 20.1 | 18.1 |
| | 3 | UC | 22.20 | 3.4 | 97.9 | 65.3 | 49.0 | 39.2 | 32.6 | 28.0 | 24.5 | 21.8 | 19.6 |
| | 4 | UC | 25.60 | 4.0 | 96.1 | 64.1 | 48.1 | 38.5 | 32.0 | 27.5 | 24.0 | 21.4 | 19.2 |
| | 5 | UC | 28.70 | 4.4 | 97.7 | 65.1 | 48.9 | 39.1 | 32.6 | 27.9 | 24.4 | 21.7 | 19.5 |
| ВХ025 чер- вен | 2 | UC | 25.30 | 3.5 | 108.5 | 72.3 | 54.2 | 43.4 | 36.2 | 31.0 | 27.1 | 24.1 | 21.7 |
| | 3 | UC | 31.00 | 4.0 | 116.3 | 77.5 | 58.1 | 46.5 | 38.8 | 33.2 | 29.1 | 25.8 | 23.3 |
| | 4 | UC | 35.80 | 4.0 | 134.2 | 89.5 | 67.1 | 53.7 | 44.7 | 38.4 | 33.6 | 29.8 | 26.8 |
| | 5 | UC | 40.00 | 4.1 | 146.4 | 97.6 | 73.2 | 58.6 | 48.8 | 41.8 | 36.6 | 32.5 | 29.3 |
| 6 | UC | 43.80 | 4.1 | 160.4 | 106.9 | 80.2 | 64.2 | 53.5 | 45.8 | 40.1 | 35.6 | 32.1 | |

| DROP SIZE RATING | |
|---------------------|---------------|
| XC Extremely coarse | 428µm ÷ 622µm |
| UC Ultra coarse | > 622 µm |

µm = thousandth of millimeter (E.g.: 250µm = 0.25 mm)